

CD11CX SERIES



ALUMINUM ELECTROLYTIC CAPACITORS

- Load life of 1000 hours at 85°C
- 7mm L standard products
- VTR, video cameras, car radios, micro cassette tape recorder, etc.




SPECIFICATIONS

Item	Characteristics																													
Operating Temperature Range(°C)	-40~+85																													
Rated Voltage Range (V)	4~100																													
Nominal capacitance range(μF)	0.1~470																													
Capacitance Tolerance(20°C, 120Hz)	±20%																													
Leakage Current (μA)	$I \leq 0.01CV$ or 3 whichever is greater. (at 20°C, after 2 minutes) C: Nominal Capacitance (μF), V: Rated Voltage (v)																													
Dissipation Factor(20°C,120Hz)	<table border="1"> <thead> <tr> <th>Rated voltage (v)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.35</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table>	Rated voltage (v)	4	6.3	10	16	25	35	50	63	100	tanδ	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.08									
Rated voltage (v)	4	6.3	10	16	25	35	50	63	100																					
tanδ	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.08																					
Temperature Stability (120Hz)	<table border="1"> <thead> <tr> <th>Rated voltage (v)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio</td> <td>z-25°C/Z+20°C</td> <td>6</td> <td>4</td> <td>3</td> <td colspan="5">2</td> </tr> <tr> <td>z-40°C/Z+20°C</td> <td>16</td> <td>10</td> <td>8</td> <td>6</td> <td colspan="4">4</td> </tr> </tbody> </table>	Rated voltage (v)	4	6.3	10	16	25	35	50	63	100	Impedance ratio	z-25°C/Z+20°C	6	4	3	2					z-40°C/Z+20°C	16	10	8	6	4			
Rated voltage (v)	4	6.3	10	16	25	35	50	63	100																					
Impedance ratio	z-25°C/Z+20°C	6	4	3	2																									
	z-40°C/Z+20°C	16	10	8	6	4																								
Load Life(+85°C)	<table border="1"> <thead> <tr> <th>Time</th> <th>1000hours.</th> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>Not more than the specified value</td> </tr> <tr> <td>Capacitance change</td> <td>within±20% of initial value</td> </tr> <tr> <td>Dissipation factor</td> <td>Not more than 200% of the specified value.</td> </tr> </tbody> </table>	Time	1000hours.	Leakage current	Not more than the specified value	Capacitance change	within±20% of initial value	Dissipation factor	Not more than 200% of the specified value.																					
Time	1000hours.																													
Leakage current	Not more than the specified value																													
Capacitance change	within±20% of initial value																													
Dissipation factor	Not more than 200% of the specified value.																													
Shelf Life (+85°C)	<table border="1"> <thead> <tr> <th>Time</th> <th>500hours.</th> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>Not more than the specified value</td> </tr> <tr> <td>Capacitance change</td> <td>within±20% of initial value</td> </tr> <tr> <td>Dissipation factor</td> <td>Not more than 200% of the specified value.</td> </tr> </tbody> </table> <p>After test: Rated voltage to be applied for 30 minutes, 24 to 48 hours before measurement.</p>	Time	500hours.	Leakage current	Not more than the specified value	Capacitance change	within±20% of initial value	Dissipation factor	Not more than 200% of the specified value.																					
Time	500hours.																													
Leakage current	Not more than the specified value																													
Capacitance change	within±20% of initial value																													
Dissipation factor	Not more than 200% of the specified value.																													

DIMENSIONS

MM

MULTIPLIER FOR RIPPLE CURRENT

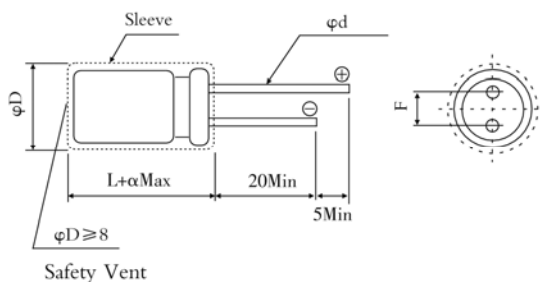

Lead spacing and diameter

φD±0.5	4	5	6.3	8
F±0.5	1.5	2.0	2.5	3.5
φd±0.1	0.45			
a	0~+1.0			

Frequency coefficient

Rated voltage(v)	Freq(Hz)			
	50,60	120	1K	10K~100K
4~16	0.80	1	1.1	1.2
25~35	0.80	1	1.5	1.7
50~100	0.80	1	1.6	1.9

Temperature coefficient

Temperature(°C)	+70	+85
Coefficient	1.35	1.00

CD11CX SERIES



■ STANDARD RATINGS

WV(v)	4		6.3		10		16		25		35		50		63		100	
Cap (μF)	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple	Size (mm)	Ripple
	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)	φDxL	(mA)
0.1	-	-	-	-	-	-	-	-	-	-	-	-	4x7	4	4x7	4	-	-
0.22	-	-	-	-	-	-	-	-	-	-	-	-	4x7	5	4x7	6	-	-
0.33	-	-	-	-	-	-	-	-	-	-	-	-	4x7	7	4x7	7	-	-
0.47	-	-	-	-	-	-	-	-	-	-	-	-	4x7	8	4x7	8	-	-
1	-	-	-	-	-	-	-	-	-	-	-	-	4x7	10	4x7	10	4x7	12
2.2	-	-	-	-	-	-	-	-	-	-	-	-	4x7	15	4x7	15	5x7	20
3.3	-	-	-	-	-	-	-	-	4x7	15	4x7	15	4x7	20	4x7	23	6.3x7	30
4.7	-	-	-	-	-	-	-	-	4x7	20	4x7	20	4x7	24	5x7	30	6.3x7	35
10	-	-	-	-	-	-	4x7	35	4x7	30	4x7	30	5x7	40	6.3x7	50	-	-
22	-	-	4x7	35	4x7	35	4x7	40	5x7	50	5x7	55	6.3x7	70	-	-	-	-
33	4x7	35	4x7	40	4x7	45	5x7	55	6.3x7	70	6.3x7	75	8x7	100	-	-	-	-
47	4x7	40	4x7	50	5x7	60	5x7	70	6.3x7	85	8x7	110	-	-	-	-	-	-
100	5x7	70	5x7	80	6.3x7	108	6.3x7	120	8x7	145	-	-	-	-	-	-	-	-
220	6.3x7	120	6.3x7	140	8x7	185	8x7	205	-	-	-	-	-	-	-	-	-	-
330	8x7	170	8x7	205	-	-	-	-	-	-	-	-	-	-	-	-	-	-
470	8x7	197	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

■ Ripple Current: 85°C, 100Hz or 120Hz

The specific capacitance and case size are available on request.