

# CD17FX SERIES



## ALUMINUM ELECTROLYTIC CAPACITORS

- High stability
- Lug type
- Low leakage current reduces battery consumption
- Used for photo flash




### SPECIFICATIONS

Item	Characteristics	
Operating Temperature Range(°C)	-20~+55	
Rated Voltage	330WV.DC	360WV.DC
Voltage Proof	350SV.DC	390SV.DC
Nominal capacitance range (µF)	150~1500	
Capacitance Tolerance(20°C,120Hz)	-10%~+20%	
Dissipation Factor(20°C,120Hz)	Capacitance:150~600µF Less than 0.1	
	601~1500µF Less than 0.15	
Leakage current	I=1XC(at 20°C, 5minutes)Max I: Leakage Current (µA) C: Nominal Capacitance (µF)	

### DIMENSIONS

MM

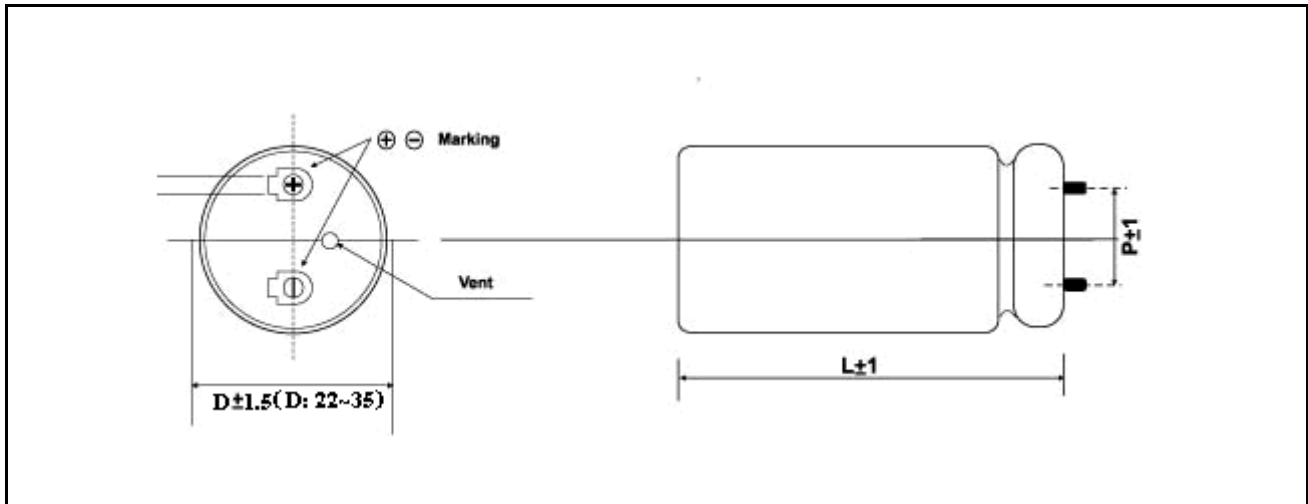

## ■ STANDARD RATINGS

### ● 330WV.DC(350SV.DC)

Capacitance	ΦD (mm)	22	25	30	35
(μF)	P	8.0	10.0	10.0	10.0
150	L (mm)	-	-	-	-
180		-	-	-	-
200		-	-	-	-
250		26	-	-	-
300		28	-	-	-
350		31	-	-	-
400		35	30	-	-
450		38	32	-	-
500		42	34	-	-
600		48	40	31	-
700		56	44	34	-
800		-	50	38	-
900		-	54	42	-
1000		-	58	44	36
1200		-	-	54	43
1300		-	-	58	45
1500	-	-	64	51	

### ● 360WV.DC(390SV.DC)

Capacitance	ΦD(mm)	22.0	25.0	30.0	35.0
(μF)	P	8.0	10.0	10.0	10.0
150	L(mm)	-	-	-	-
180		-	-	-	-
200		26	-	-	-
250		30	-	-	-
300		35	30	-	-
350		40	32	-	-
400		42	35	-	-
450		48	40	-	-
500		56	44	34	-
600		-	50	38	-
700		-	58	44	-
800		-	-	50	38
900		-	-	54	43
1000		-	-	58	48
1200		-	-	70	55
1300		-	-	-	59
1500	-	-	-	71	

■ The specific capacitance and case size are available on request.